



# Installation Information

## Acmeda Blind Safety Information

### Child Safety Instructions

*For Blinds With Chain Control*

#### Warning

- The chain tension device must be fitted to ensure child safety
- The chain tension device is to be positioned at the bottom of the chain loop
- It can be fitted to the inside of the reveal (Frame) or in front of the reveal (Frame)



#### Fitting Instructions

1. Position the tension device at the bottom of the chain loop (Figure 1).
2. Install the tension device onto the reveal/frame, making sure that the loop chain hangs with minimal tension (Figure 2).

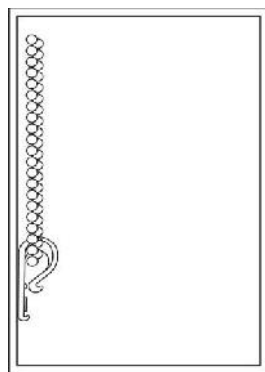


Figure 1

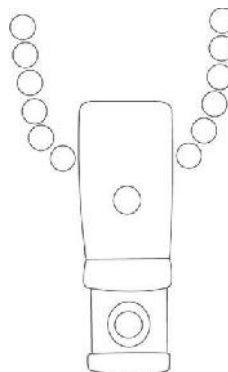


Figure 2



### **WARNING – ALL WINDOW COVERINGS WITH CORD OR CHAIN**

To avoid creating a possible strangulation hazard for children, the corded or chained internal window covering must be installed in such a way that a loose cord or chain cannot form a loop 220mm or longer at a height of less than 1600mm above floor level.

- A cord/chain guide may be installed lower than 1600mm above floor level if the cord/chain is sufficiently secured or tensioned to prevent a loop 220mm or longer being formed
- If a cord/chain guide is installed lower than 1600mm above floor level, it must be designed to prevent a child from being able to remove the cord/chain
- If a cleat is used to secure the cord, it must be at least 1600mm above floor level because a child is capable of unwinding a cord from a cleat